


HD 12 A



HD
HDM

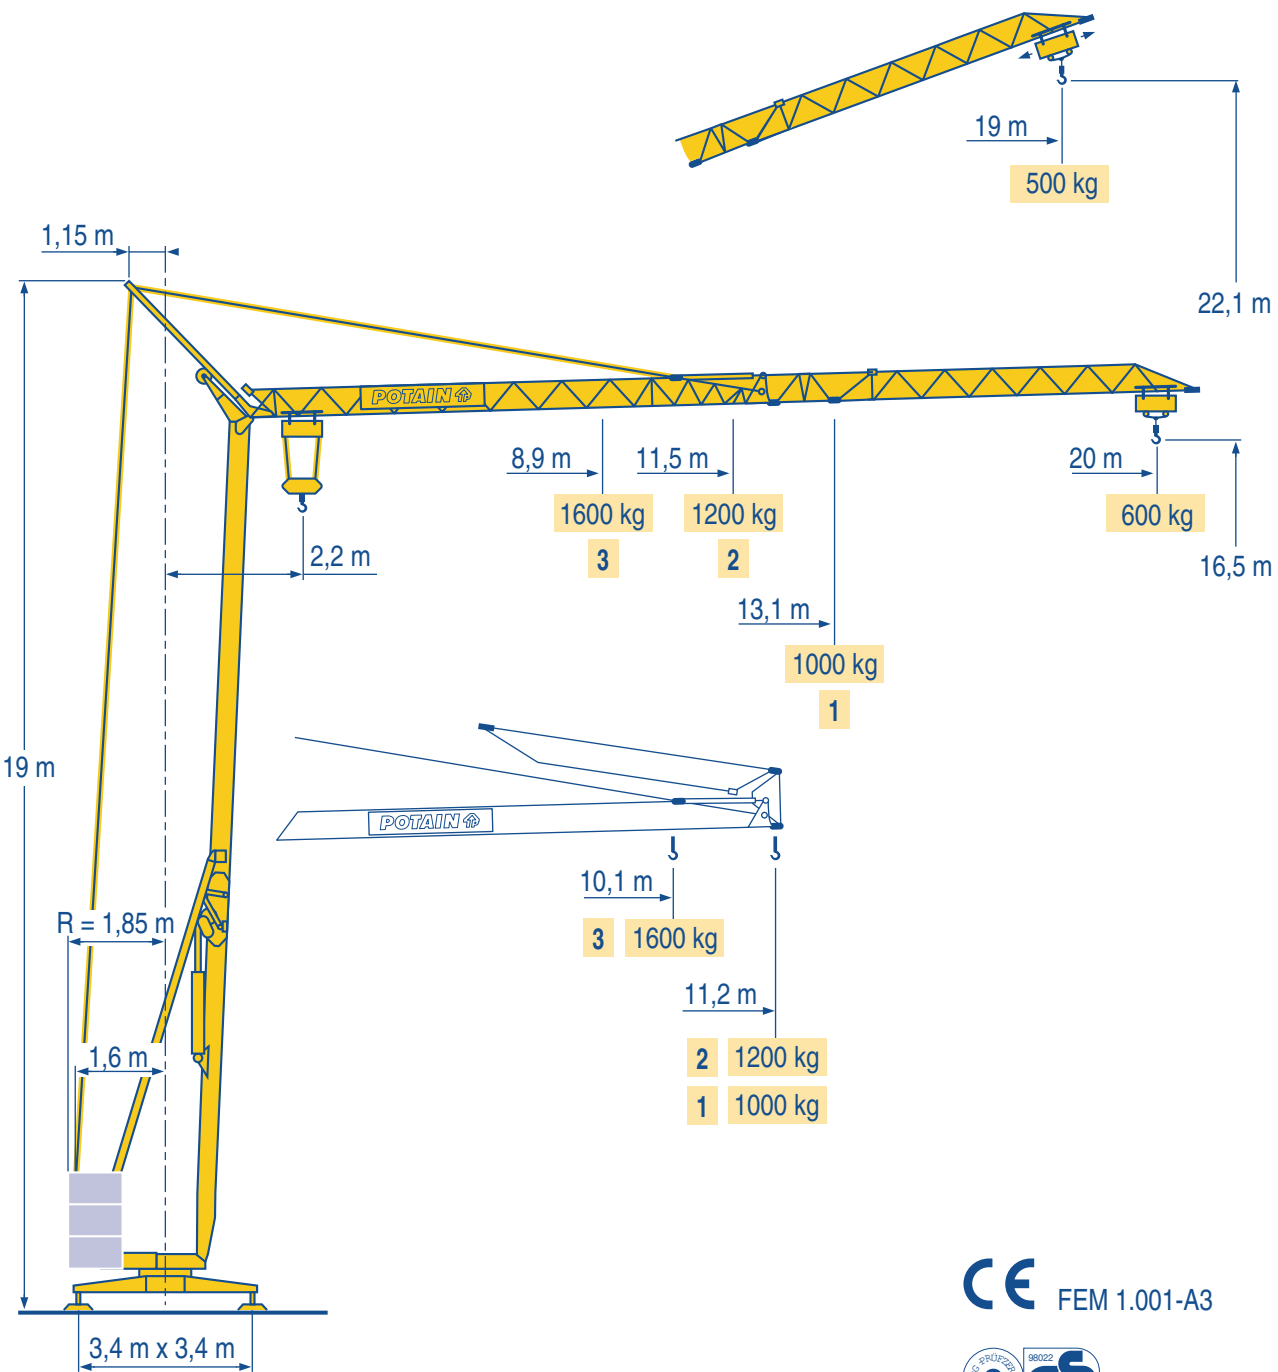

HDT



GTMR



CITY CRANE



TOPKIT MD
MAXI MD



MAXI TOPKIT



Topless MDT




MR




CE FEM 1.001-A3



POTAIN 

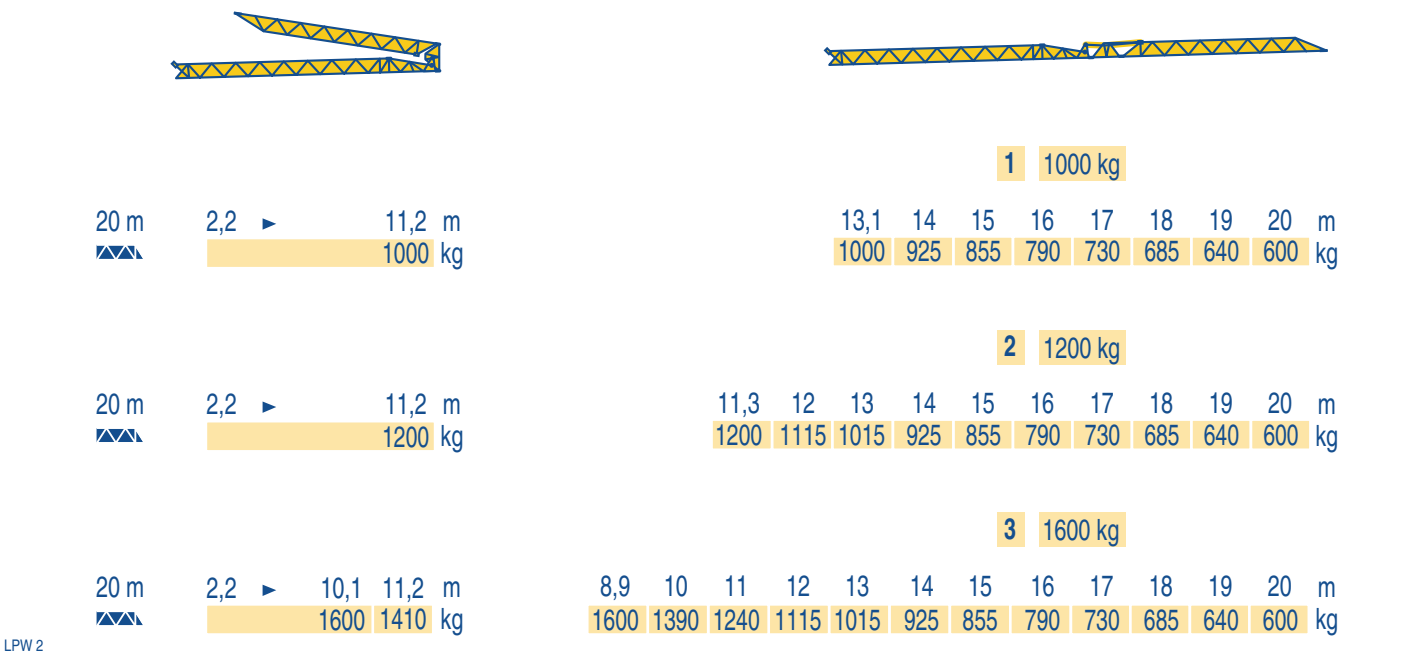

LPW 2

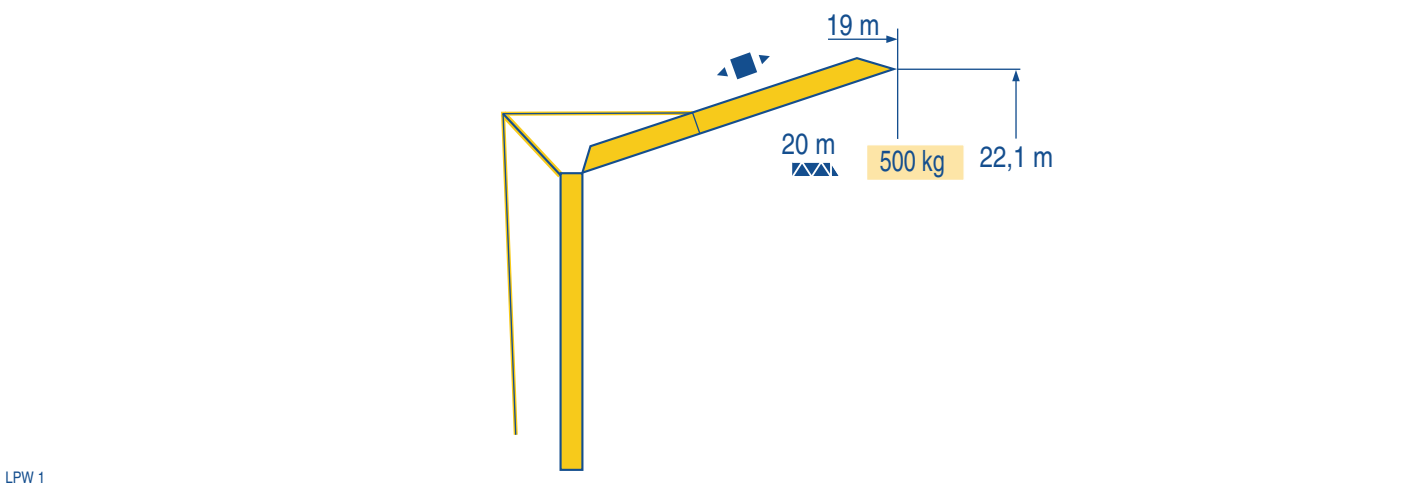

LPW 1


LPW 2

● ■	Réactions en service Réactions hors service A vide sans lest (ni train de transport) avec flèche et hauteur maximum	F	Reactions in service Reactions out of service Without load, ballast (or transport axes), with maximum jib and maximum height.	GB	Reazioni in servizio Reazioni fuori servizio A vuoto, senza zavorra (ne assali di trasporto) con braccio massimo e altezza massima	I
● ■	Reaktionskräfte in Betrieb Reaktionskräfte außer Betrieb Ohne Last, Ballast (und Transportachse), mit Maximalausleger und Maximalhöhe.	D	Reacciones en servicio Reacciones fuera de servicio Sin carga, sin lastre, (ni tren de transporte), flecha y altura máxima.	E	工作状态下的反应 非工作状态下的反应 空载无压重也无运输车有吊臂和最大高度	C

							ch - PS hp	kW
	3 L2 V5 1 Mono-Triphase	400 / 230 V 230 V	m/min	—	9	18	3	2,2
			kg	—	1000	600		
	1 DC1 V2	—	m/min	20			1,5	1,1
	6 L2 V6 2	400 V	m/min	—	15	30	6	4,4
			kg	—	1200	700		
	6 PC 8 3	400 V	m/min	5	15	30	6	4,4
			kg	1600	1600	700		
	6 LVF 6 2	230 V	m/min	↑ 3 ↓ 3	↑ 10 ↓ 17	↑ 17 ↓ 30	5,5	4
			kg	1200 1200	1200 1200	700 700		
		400 V	m/min	↓ 3	↓ 17	↓ 30		
			kg	1200	1200	700		
	1 D1 V2	230 / 400 V	m/min	28			1,5	1,1
		400 V					1	0,75
	RVF 20	—	tr/min U/min rpm	0 → 0,9			1,4	1
CEI 38 IEC 38				kVA				
230 V(+6% -10%) 50 Hz 400 V(+6% -10%) 50 Hz				230 V : 4,6 kVA 400 V : 9 kVA			84/534 - 87/405	

LPW 3

● ■	Levage Distribution Orientation 50 Hz Monophasé Conforme aux directives CEE 84/534 et 87/405 sur le niveau acoustique	F	Hoisting Trolleying Slewing 50 Hz Single phase In compliance with the EEC 84/534 and 87/405 Instructions on noise level	GB	Sollevamento Distribuzione Rotazione 50 Hz Monofase Conforme alle direttive CEE 84/534 e 87/405 sul livello acustico	I
● ■	Heben Katzfahren Schwenken 50 Hz Einphasige Gemäss EWG-Richtlinien 84/534 und 87/405 für den Schall-Leistungspegel	D	Elevación Distribución Orientación 50 Hz Monofasica Conforme con las directivas CEE 84/534 y 87/405 sobre el nivel acustico	E	起升 变幅 回转 电源 : 50 Hz 单相 符合 CEE 84/534 - CEE 87/405 声晌度规定	C

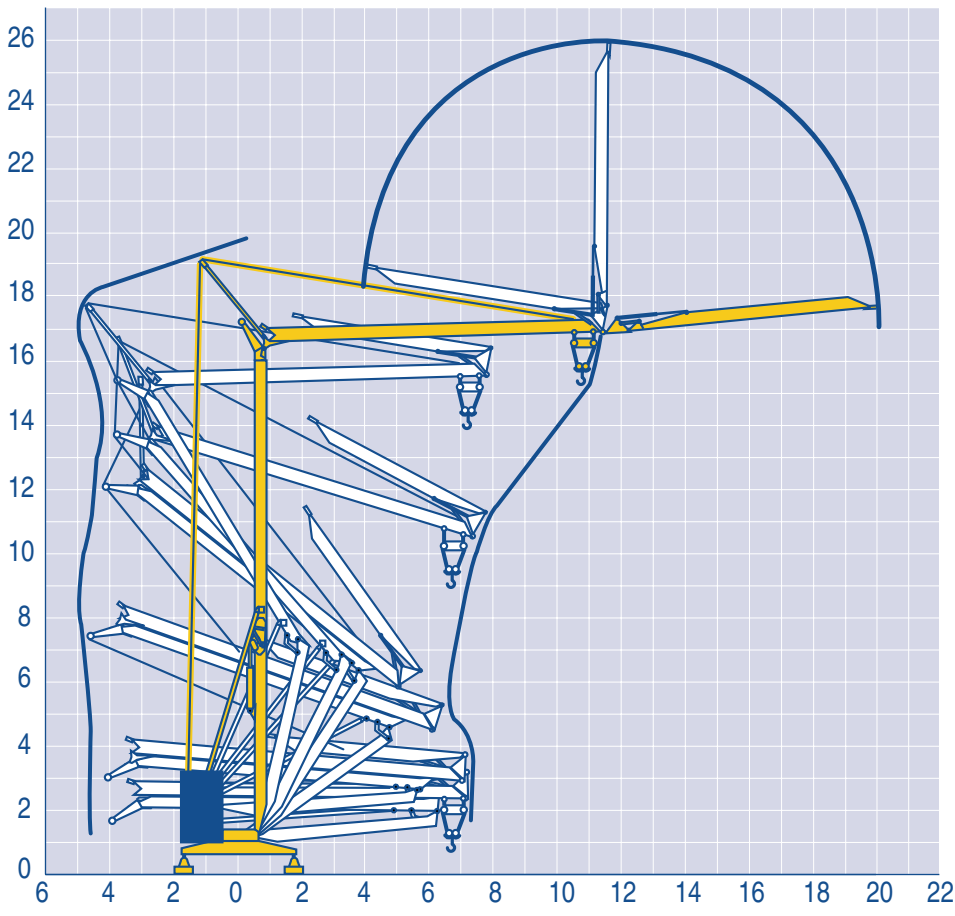


Transport
Transport

F Transport
D Transporte

GB Trasporto
E 运输

I
C

- DS51/S70 ○
- DS60/S80 ○
- DS65/S65
- DS95/S105

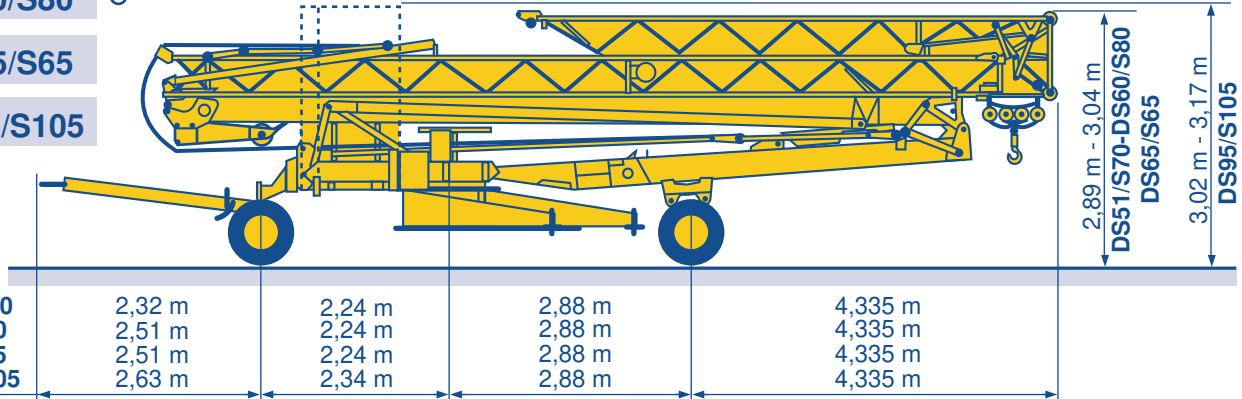

DS51/S70	2,32 m	2,24 m	2,88 m	4,335 m
DS60/S80	2,51 m	2,24 m	2,88 m	4,335 m
DS65/S65	2,51 m	2,24 m	2,88 m	4,335 m
DS95/S105	2,63 m	2,34 m	2,88 m	4,335 m

- Chantier
- Baustelle

F Site
D Obra

GB Cantiere
E 工地运输

I
C



18.Rue de Charbonnières, B.P. 173
F-69132 ECULLY Cedex
Tél. (33)04.72.18.20.20
Fax (33)04.72.18.20.00
<http://www.potain.com>
E-mail : mkt@potain.fr

HD 12 A

Copyright.Reproduction interdite © POTAIN 1998

Deutschland
POTAIN GmbH
Tel : 06.105.704.0
Italia
POTAIN S.p.A.
Tel : 0.331.49.33.11
Singapore
POTAIN PTE LTD
Tel : (00.65) 227.1550