


HD 32 B



Igo
HD
HDM

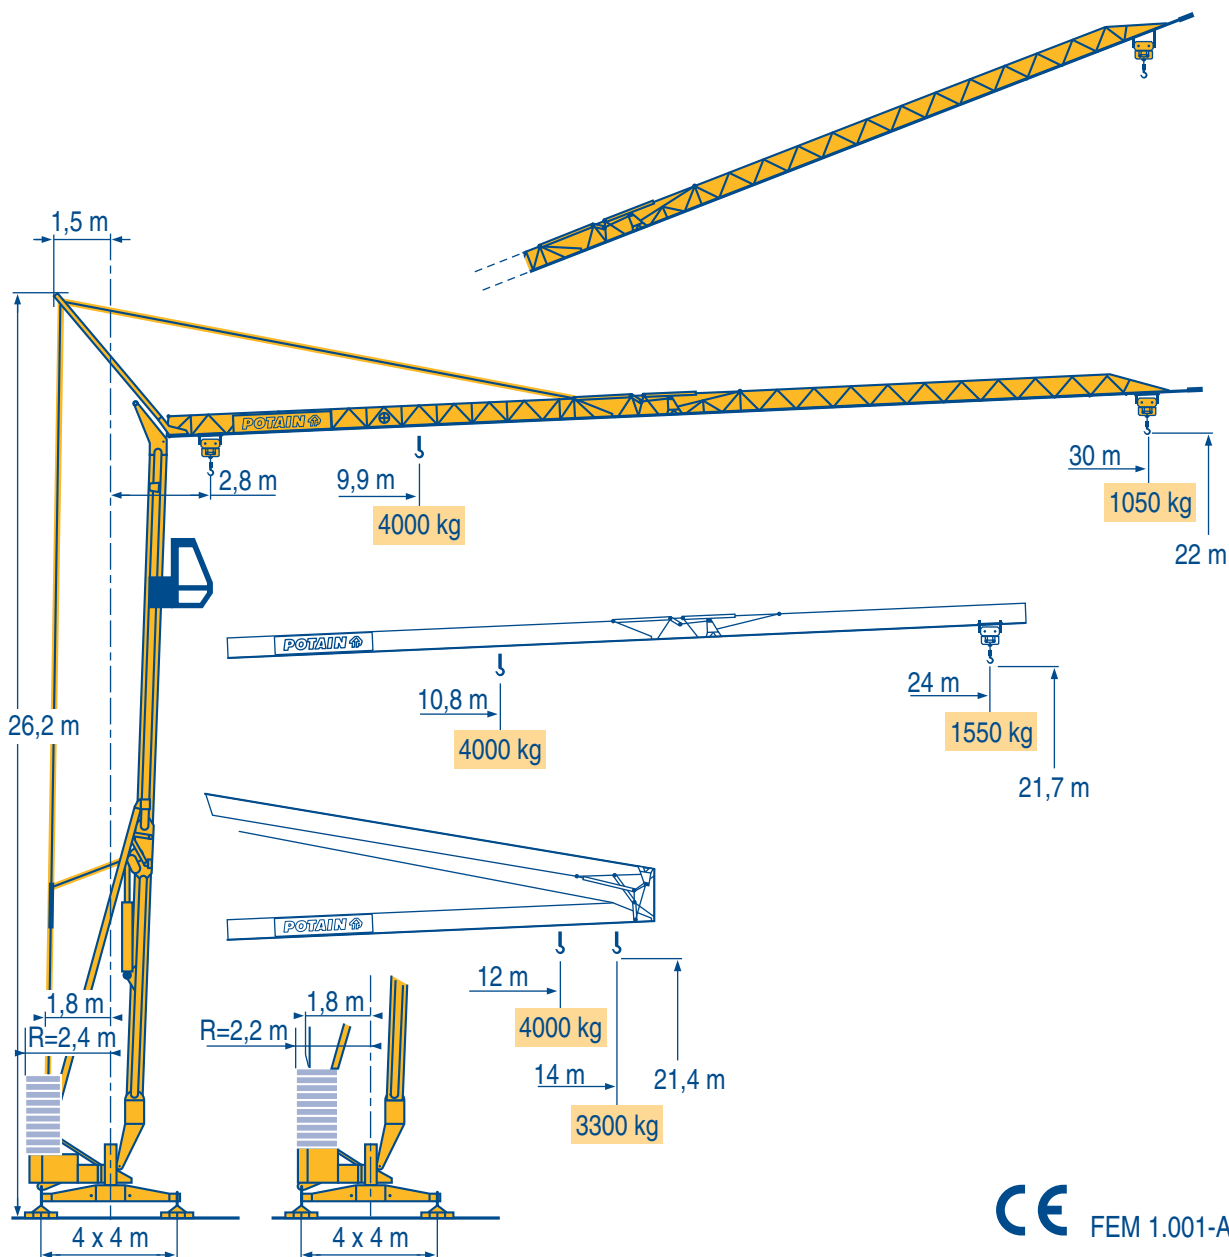

HDT



GTMR



CITY CRANE



TOPKIT MD
MAXI MD



MAXI TOPKIT



Topless MDT





MR




CE FEM 1.001-A3



POTAIN ®

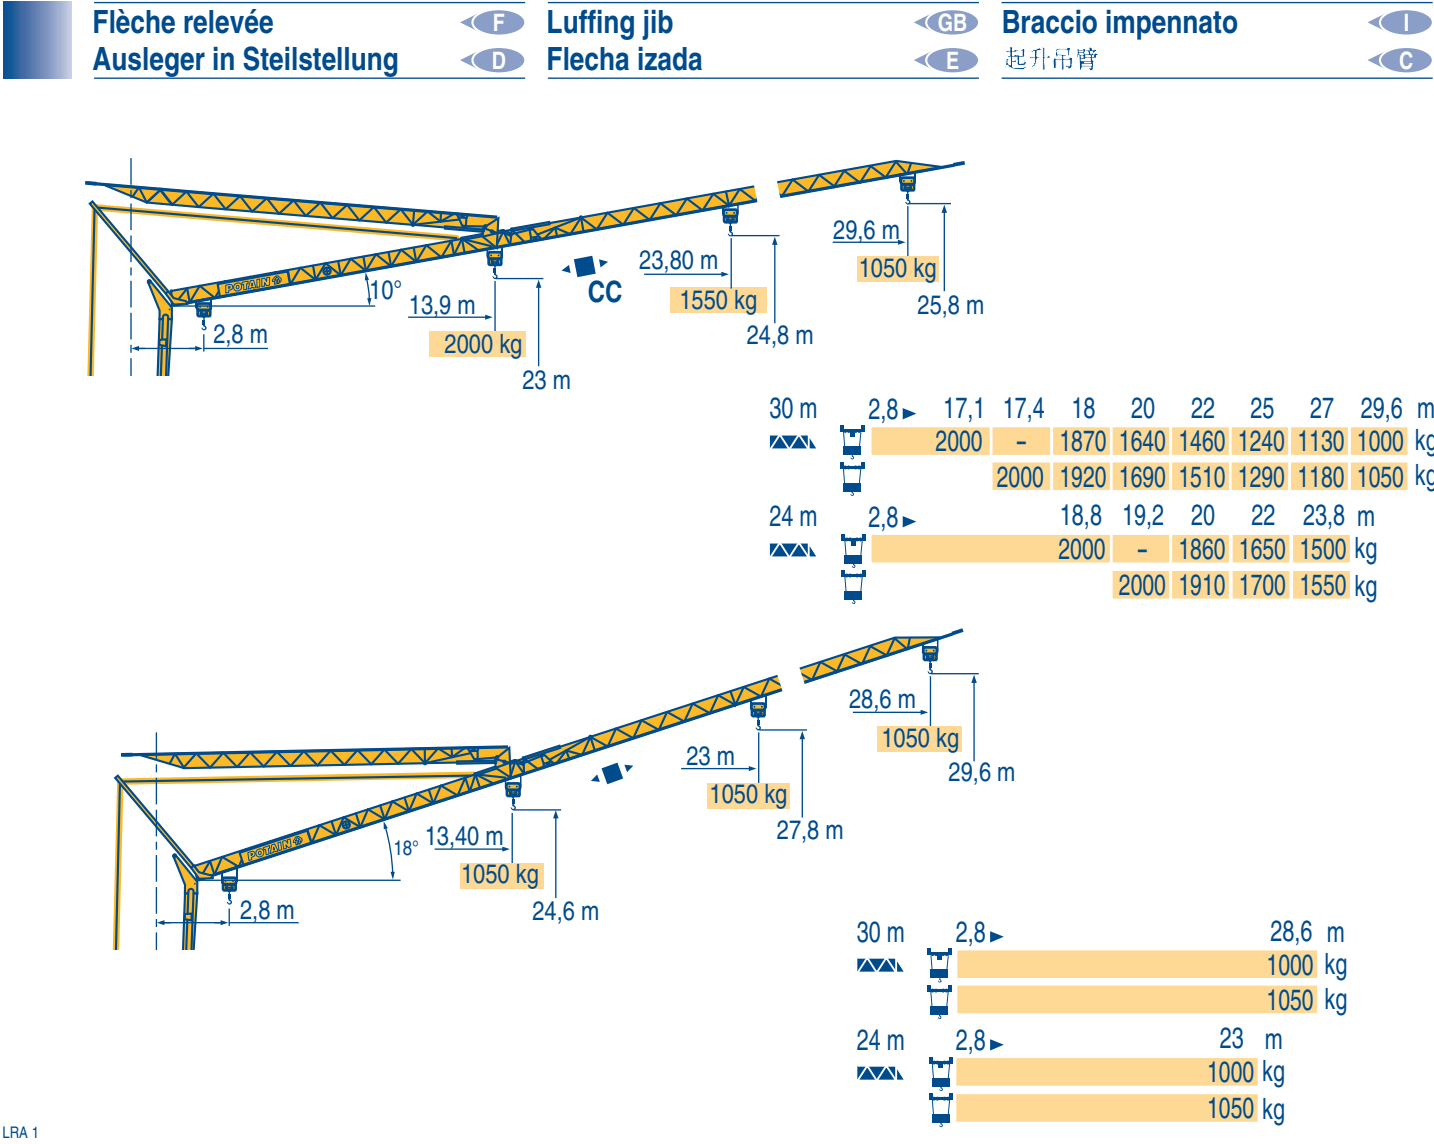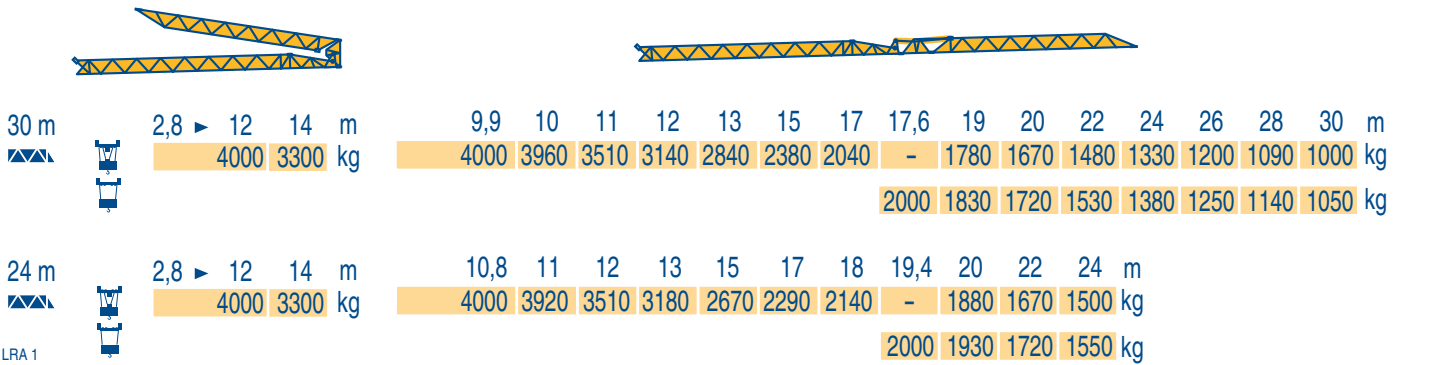

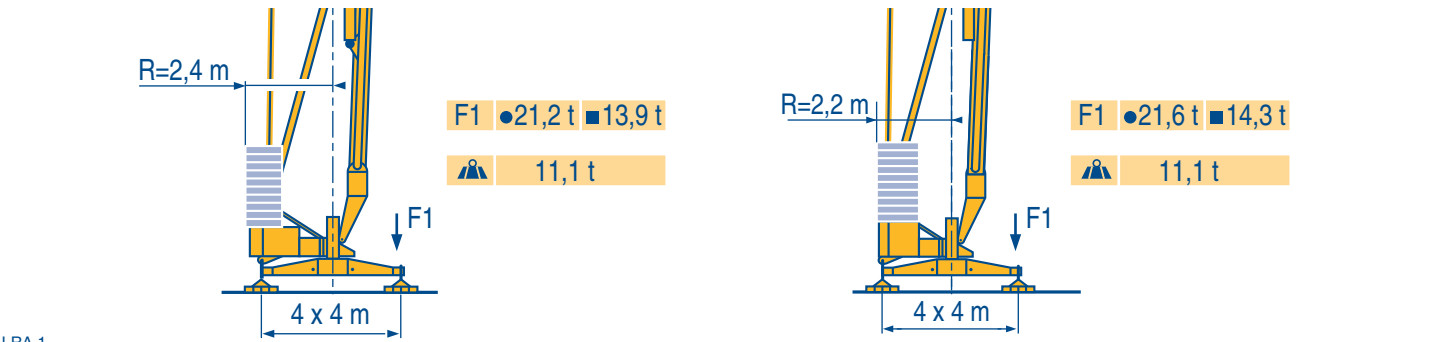


● Réactions en service ■ Réactions hors service A vide sans lest (ni train de transport) avec flèche et hauteur maximum	F D	Reactions in service Reactions out of service Without load, ballast (or transport axes), with maximum jib and maximum height.	GB E	Reazioni in servizio Reazioni fuori servizio A vuoto, senza zavorra (ne assali di trasporto) con braccio massimo e altezza massima	I C
● Reaktionskräfte in Betrieb ■ Reaktionskräfte außer Betrieb Ohne Last, Ballast (und Transportachse), mit Maximalausleger und Maximalhöhe.	D	Reacciones en servicio Reacciones fuera de servicio Sin carga, sin lastre, (ni tren de transporte), flecha y altura máxima.	E	工作状态下的反应 非工作状态下的反应 空载无压重也无运输车 有吊臂和最大高度	C


											ch - PS hp	kW
	15 LVF 10	m/min	5	27	43	53	2,5	13,5	21,5	26,5	15	11
		kg	2000	2000	1250	1050	4000	4000	2500	2000		
	15 RPC 10 A	m/min	9	27		54	4,5	13,5		27	15	11
		kg	2000	2000		1050	4000	4000		2000		
	3 D2 V5/2	m/min	21 - 42								2,7	2
	RVF 2 30	tr/min U/min rpm	0 → 0,2 → 0,8								1,5	1,1
CEI 38			IEC 38				kVA					
400 V (+6% -10%) 50 Hz							20 kVA				84/534 - 87/405	

LRA 2

Levage Distribution Orientation Conforme aux directives CEE 84/534 et 87/405 sur le niveau acoustique	F D	Hoisting Trolleying Slewing In compliance with the EEC 84/534 and 87/405 Instructions on noise level	GB E	Sollevamento Distribuzione Rotazione Conforme alle direttive CEE 84/534 e 87/405 sul livello acustico	I C
Heben Katzfahren Schwenken Gemäss EWG-Richtlinien 84/534 und 87/405 für den Schall-Leistungspegel	D	Elevación Distribución Orientación Conforme con las directivas CEE 84/534 y 87/405 sobre el nivel acustico	E	起升 变幅 回转 符合 CEE 84/534 - CEE 87/405 声响度规定	C

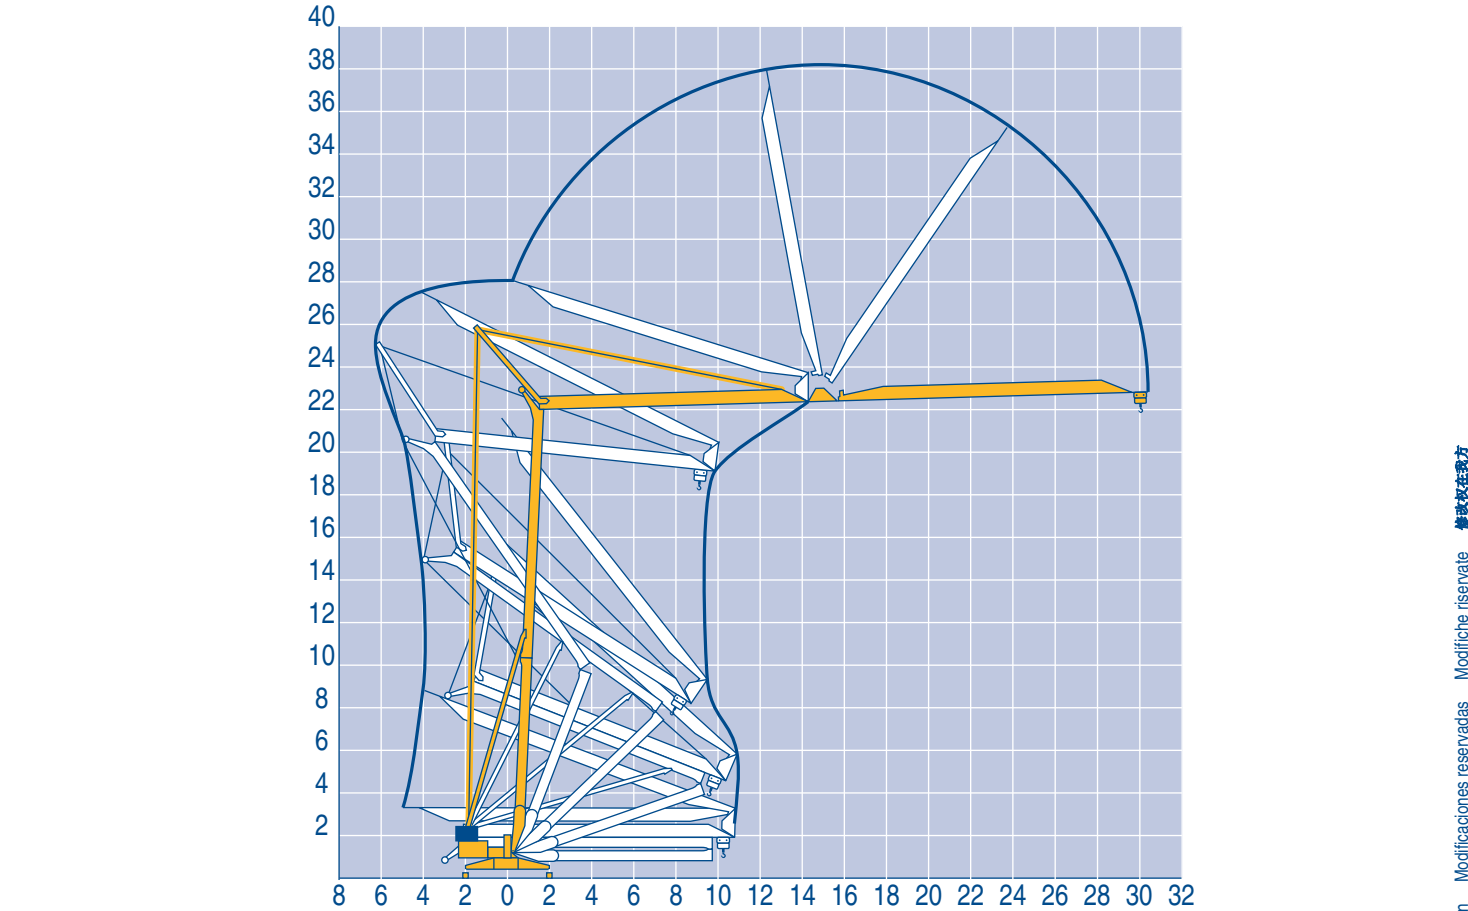

LRA1

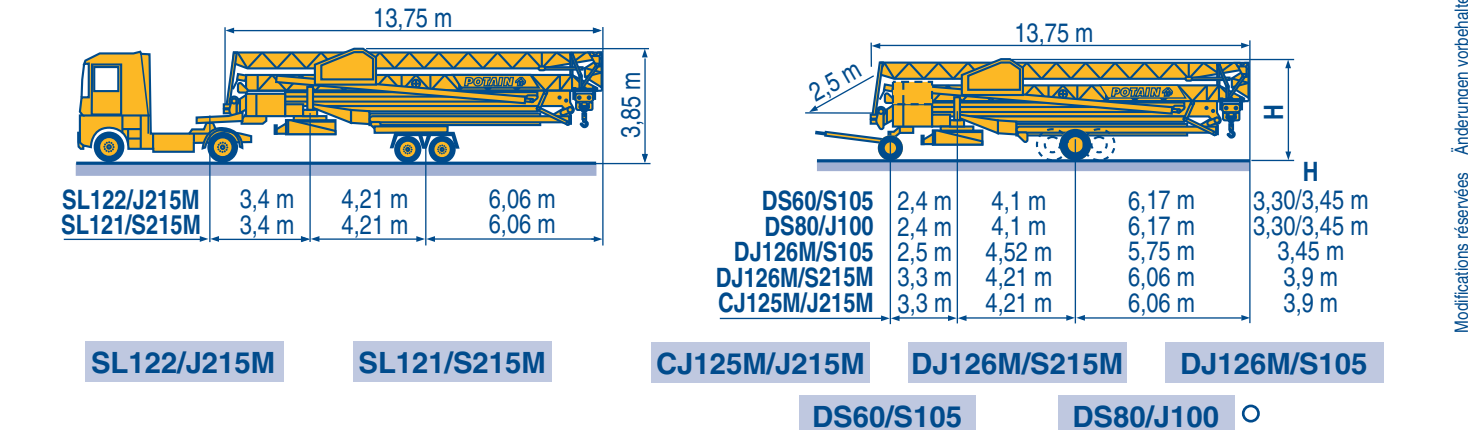

SL122/J215M	SL121/S215M	CJ125M/J215M	DJ126M/S215M	DJ126M/S105
DS60/S105	DS80/J100			